


MONITOR PRODUCTS, INC.
15400 Flight Path Dr
Brooksville, FL 34604
Tel: 800-334-4591 Sales: ext 201
Technical Support: ext 209 & 210
Fax: 352-544-0870



GM 4.3L, 5L, 5.7L
FRESHWATER COOLING
KIT SPECIFICATIONS

MFH-5433

MFH-5433 V6-V8 Freshwater Cooling Kit

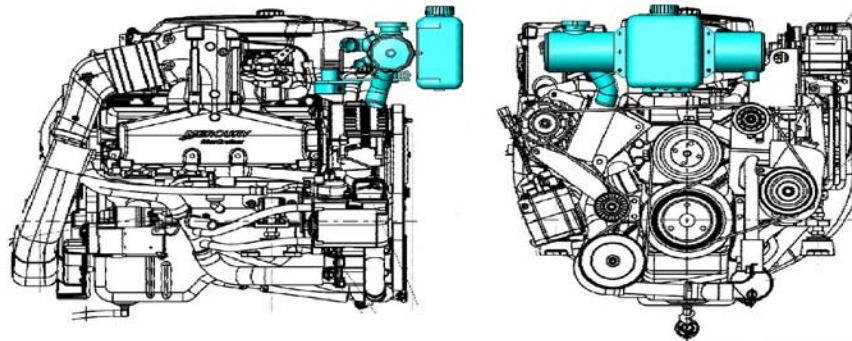

CONVERSION KIT FITS:

1999 – present MerCruiser GM 4.3L, 5.0L and 5.7L (262, 305 and 350 CID) models with a single serpentine belt/single-belt (will NOT fit v-belt or multi-belt equipped engines). Sterndrive and inboard (EXCEPT V-drive installations). For sterndrive applications, the power steering pump should be mounted low on the port side and alternator on the upper starboard side (For engines with the power steering mounted high on the port side and serpentine belt order kit MFH-5229 or MFH-5398). For inboard applications, the alternator should be located on the lower starboard side of the engine. Heat exchanger is 4-1/8" diameter x 21" long and fits within overall length, width, and height of most engine conversions (adds 1-1/2" to overall length of 2001 and newer MPI installations). Heat exchanger extends from extreme starboard side of a normal exhaust manifold towards port. Plastic expansion tank mounts either on front of heat exchanger or if space is limited on vertical surface next to engine.

COOLING SYSTEM TYPE

This kit is a block only fresh water cooling [FWC] system; meaning that only the engine block is protected by the system. Exhaust elbows and exhaust manifolds remain on the raw water system. System utilizes a unique, high performance heat exchanger. Our FWC systems are specially designed for the low capacity raw water pumps used on sterndrive engines.

CONVERSION KIT

Kit includes heat exchanger, heavy-duty translucent plastic expansion tank, complete instructions, and all other components necessary to convert a raw water cooled engine to FWC. Some existing water hoses and hose clamps are reused. Heat exchanger, thermostat housing and mounting brackets are finished in black. Fasteners are zinc/cadmium plated or stainless steel. All hose clamps are 3XX series stainless steel.

MONITOR PRODUCTS, INC.
15400 Flight Path Dr
Brooksville, FL 34604
Tel: 800-334-4591 Sales: ext 201
Technical Support: ext 209 & 210
Fax: 352-544-0870



GM 4.3L, 5L, 5.7L
FRESHWATER COOLING
KIT SPECIFICATIONS

MFH-5433

HEAT EXCHANGER

High-flow, shell and tube design allowing a higher cooling capacity than standard. All copper alloy construction made to the highest industry standards. Includes heavy-duty, dual, demountable end covers for easy clean-out.

COOLING SYSTEM CAPACITY

Will maintain coolant temperatures in the 160-170°F range using 160°F thermostat included in kit. System has cooling capacity safety margin higher than industry standards.

HEATER SYSTEM HOOKUP

Heaters such as galley water heaters and cabin heaters are easily connected to the system by utilizing the cooling system bypass connections.

INSTALLATION TIME

Average installation time is approximately 2-3 hours, assuming new engine and normal accessibility. Allow additional time for filling and testing. Installation skills are typical of most do-it-yourself boat owners. Complete illustrated installation instructions are included in kit.

WARRANTY

Two year warranty. For complete details see Limited Warranty for Fresh Water Cooling Kits document enclosed with your kit and located on policies page of our website.

PRICE

Trade and volume discounts available. Buy through your dealer or direct using Visa, MasterCard, Amex, UPS COD, or Money order.